


Exceptional Maneuverability, Smooth Ride, Outstanding Durability

X3-45 VIP FOR ULTIMATE CLASS CONVERSION



- Low center of gravity for excellent driveability
- Abundant under floor storage and custom conversion space
- Exceptional handling with an independent suspension system

- Integral stainless steel structure for optimal passenger safety
- Prevost Electronic Stability Program provides improved stability in adverse conditions
- Environmentally friendly Volvo D13 engine exceeds EPA emission regulations for clean air and fuel economy

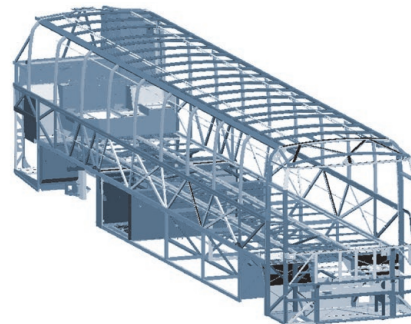

PREVOST
The ultimate class.


X3-45 VIP SPECIFICATION HIGHLIGHTS

GENERAL

Length, Overall (ft)	45
Wheelbase (in)	334.5
Width, Overall (in)	102
Height, Overall (in)	141
Floor-to-ceiling Height (in)	89
Cabin Floor Height (in)	48.5
Underfloor Storage (w/Driver A/C) (cu. ft.)	433
Underfloor Compartment Doors Width (in)	70 5/8
Entrance Door Width (in)	30
Step Height (in)	7", inside entrance steps 9 3/8" for the first step from the ground when kneeled
Ground Clearance (in)	11
Overhang (incl. Bumper) - Front (in)	72.25
Overhang (incl. Bumper) - Rear (in)	86.5
Turning Radius (ft)	43.5
Body Construction (Structure)	Integral (Stainless/Rust Protected Mild Steel)
Body Construction	Luggage doors and side panels: Ribbed stainless steel
Body Construction (Sub-Frame)	Low-Alloy/High Tensile Steel
State-of-the-art Soundproofing	Standard
Fuel Tank (US Gallons)	208
Fuel Filler Necks on Both Sides	Standard
Gross Vehicle Weight Rating (lb)	55,500
Axle Design Load Capacity - Front (lb)	19,000
Axle Design Load Capacity - Drive (lb)	22,500
Axle Design Load Capacity - Tag (lb)	14,000
Wet Weight, w/Driver A/C (lb/kg)	30150/13705
Wet Weight, w/Full A/C (lb/kg)	30850/14023
Driver-only A/C	Standard
Full A/C	Optional
A/C Condenser with Copper Fins	Standard with full A/C
A/C Refrigerant	134A
Cooling Capacity/Full A/C	108,000 btu/hr or 9 tons

TIRES AND WHEELS

Michelin 315/80R22.5 (Drive Axle)	Standard
Michelin 365/70R22.5 (Front and Tag Axles)	Standard
Aluminum Wheels 22.5 x 9 in. (Drive Axle)	Standard
Aluminum Wheels 22.5 x 10.5 in. (Front and Tag Axles)	Standard
Dura-Bright Coating (Aluminum Wheels)	Optional
Michelin 455/55R22.5 Super Single Tires with 14" Wheels (Drive Axle)	Optional

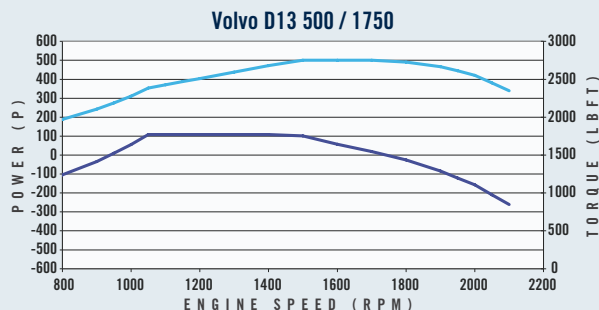

POWERTRAIN

EPA compliant Volvo D13 engine 500HP with Diesel particulate Filter (DPF) and Selective Catalytic Converter (SCR)	Standard
Engine Torque Rating (ft.-lb.)	1750
Allison 5th Generation 6 speed Automatic transmission B500 (Commercial) / 4000MH (RV)	Standard
Allison Hydraulic Transmission Retarder	Optional
Cruise Control	Standard
Engine Brake (on all cylinders)	Optional
Pneumatic Drive Belts Tensioners	Standard
Turbo-boost Gauge	Standard
3-Speed Engine Cooling Fan	Standard
Engine Coolant Filter	Standard
Two-step Dual Filter with water separator	Standard
Prevost Liaison – 1 year coverage	Standard

BRAKES

All-disc Brakes with ABS	Standard
Front Wheels Brake Boosters	Type 27
Driver Wheels Brake Boosters	Type 24-24
Tag Wheels Brake Boosters	Type 14-16
Parking Brake Booster on Tag Wheels	Standard

STEERING AND SUSPENSION

Tilt and Telescopic Steering Wheel	Standard
ZF Constant Assistance Power Steering System	Standard
ZF Variable Assistance Power Steering System	Standard
Independent Suspension System	Standard
Front and Drive Axle Sway Bars	Standard
Integrated Pneumatic Level - Low Leveling System	Standard
Liftable Tag Axle	Standard

ELECTRICAL SYSTEM

Fully Multiplexed Electrical System	Standard
12-volt Exterior Lighting	Standard
24-volt Main System	Standard
Additional Alternator Configurations for conversion	Optional
4 AGM batteries	Standard
Prime - battery management system	Standard

INNOVATIVE SAFETY FEATURES

Prevost Electronic Stability Program	Standard
Prevost AWARE - Adaptive Cruise and Collision warning system	Optional
Automatic Fire Suppression System	Standard
Beru Tire Pressure Monitoring System	Standard
Xenon Headlights	Standard

FACTORY-INSTALLED EQUIPMENT

Factory Slide-Outs (1 or 2 Electrical Gear Driven with Aluminum Frames)	Optional
Front - Interior	170" x 30" x 77"
Regular Rear - Interior	86" x 24" x 65"
Super - Slide Rear Left - Interior	130" x 24" x 65"
Choice of Side Window Arrangement & Type Dual-Pane Fixed, Electrical Awning or Sliding	Optional
Fog Lights	Standard
Upper Side Window (Front Cap)	Optional
Driver's Window Blind	Optional
Left/Right Windshield Manual Blind	Standard
Electric Windshield blinds LH and RH	Optional
Ramco Remote Heated Rearview Mirrors w/ Separate Convex Top (Painted in Black)	Standard
w/ Separate Convex Top (Chromed)	Optional
Signal Mirrors w/ LED Light	Optional
Central Electrical Door Locking System	Standard
Remote Keyless Locking (Entrance Door)	Standard
Remote Keyless Locking (Compartment Doors)	Standard
Trailer Hitch Package (20,000 lb)	Standard
Trailer Air Brake Connection	Optional
Low Fuel Warning Light	Standard
Turn Signal Lights (2 Extra)	Standard (8 total)
Sidemarkers Lights (2 Extra)	Standard (8 total)
Courtesy Lights Blinker Switch	Standard
Engine and Compartment Lighting	Standard
Driver Delivery Seat	Standard
ISRI 6832 3 pt Seat Belt Air Ride Seat	Optional
ISRI 6832 Climate Control (heater and air circulation)	Optional
Exterior Graphic Design Assistance	Optional
Factory Exterior Paint w/Special Effect	Optional
Back-up Sound Alarm	Standard
Headlamp Cleaning System	Standard
Wood and Leather Smart Steering Wheel	Standard
Leather	Optional

For sales information: 336-393-4807
www.prevostcar.com | e-mail: prevostcar@volvo.com

These specifications are based on the latest product information available at time of printing (12/14) and are subject to change. Contact your Prevost Sales Manager for full details on standard features, packages and options available on the latest model.

© Prevost, The Ultimate Class and X3-45 VIP are registered trademarks of Prevost, a division of Volvo Group Canada Inc. All rights reserved.